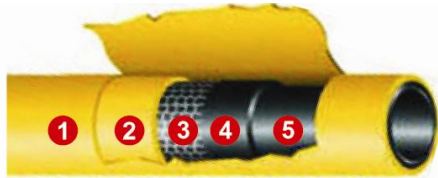


Complete hose solutions:

- 1 2** yellow double PVC-coating
- 3** premium jersey inlay
- 4 5** black double inlay

PVC- hose 1"

multiple coated hose
tricroflex hose
premium quality with jersey inlay
twist-free, highly flexible and non-ageing
Inlay: black, smooth surface
cover: yellow, smooth surface
temperature range: -15°C up to +60°C
max. pressure 12 bar (20°C)
tripe safety

**Art.Nr. 1401 5 m length****Art.Nr. 1402 10 m length**

clamps stainless steel

Hose per meter:

- 1 2** yellow double PVC-coating
- 3** premium jersey inlay
- 4 5** black double inlay

PVC- hose 1"

multiple coated hose
tricoflex hose
premium quality with jersey inlay
twist-free, highly flexible and non-ageing
Inlay: black, smooth surface
cover: yellow, smooth surface
temperature range: -15°C up to +60°C
max. pressure 12 bar (20°C)
tripe safety

Art.Nr. 140**Fast coupling (hose-side)**

brass (MS 58) polished, hose size 1"
25 mm nozzle, end of nozzle higher for better
hose fit

Art.Nr. 5101**Clamp**

with worm gear DIN 3017,
of stainless steel 1.4016,
worm screw of zinc coated steel

Art.Nr. 0807082




Fast coupling (pump-side)
G 1¼" male thread, brass (M 58)
(suitabel for range K 2)

Art.Nr. 510




Coupling Storz C (pump-side)
including Storz C coupling 1¼" female thread
(Art.: 0401900) and
zinc-coated fitting 1¼" male thread (Art.: 530)
(suitable for range K 3 and K 5)

Art.Nr. 0201900

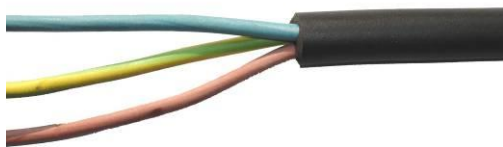

**Connection-line extension
for types „S“ and standard types**
3-wire
H07RN-F 3G1,5

Art.Nr. 000071

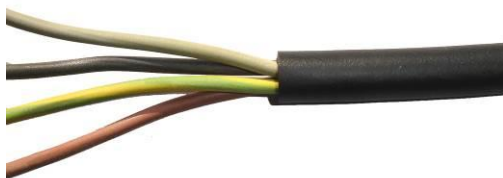

**Connection-line extension
for types „SA“**
4-wire
H07RN-F 4G1,5

Art.Nr. 0000710