



MULTI-PURPOSE PUMP NP 4 L

Self-priming centrifugal trash pump ▪ Electric Drive 230 V

PUMP:
maintenance-free
dry-running safe

Dry weight 26 kg



Solids passage \varnothing 8 mm

Q max. 320 l/min.

Optional with couplings „TW“

APPLICATION AREA:

Wastewater with solids.
(Heating oil and Diesel at room temperature)

Max. liquid temperature: $\leq 100^{\circ}\text{C}$


Max. liquid density: $\leq 1,1 \text{ kg/dm}^3$

pH-limitations: 5-8

FLOW RATE:

Q l/min	H m (WC)
320	0
270	5
190	10
150	12
0	15

Förderhöhe H m (WS)

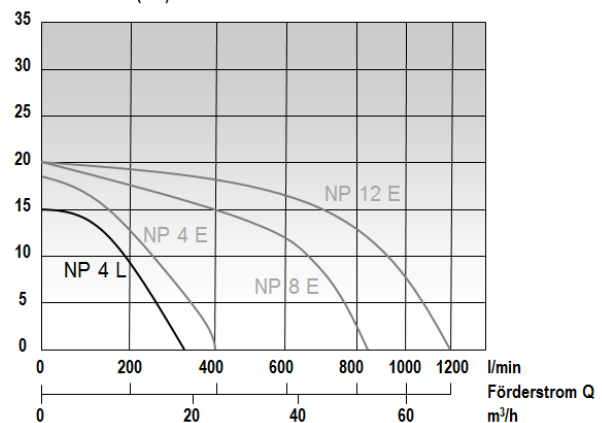

CHARACTERISTICS:

Pump type:	1~ 230 V Single-phase AC 50 Hz
Power P:	0,75 kW
Rated current:	5,4 A
Shaft speed:	2850 U/min.
Total weight:	26 kg
Dimensions:	L 48 x B 28 x H 43 cm
Connections:	G 2"
Discharge Conn.:	STORZ C (52 mm)
Solids passage:	\varnothing 8 mm
Cable:	ÖLFLEX 540 P 3G1,5 (1,5 m)
Plug:	Schuko®-rubber plug with overload protection 16A IPX4

MATERIALS:

Pumphousing:	Aluminum alloy acc. to DIN EN 1706*
Tubular frame:	Coated steel
Impeller:	Special cast iron acc. to DIN EN 1561*
Diffuser:	Special cast iron acc. to DIN EN 1561*
Gaskets:	Mineral oil resistant elastomer
Mechanical seal:	Carbon / Ceramics

*seawater resistant



MAST PUMPEN GmbH
Pump manufacturer
Mörikestr. 1 ▪ D-73773 Aichwald

+49 711 936704-0
info@mast-pumpen.de
www.mast-pumpen.de

Subject to change. V_01/17